

Low Insertion Force Female Solder Contact


Designed for Soldering directly to
Flexible PCB or Ultra Thin Rigged PCBs

Tin Plating as Standard,
Others Available Upon Request

2.54mm Pitch

RoHS Compliant, Lead Free

Phosphor Bronze Contact

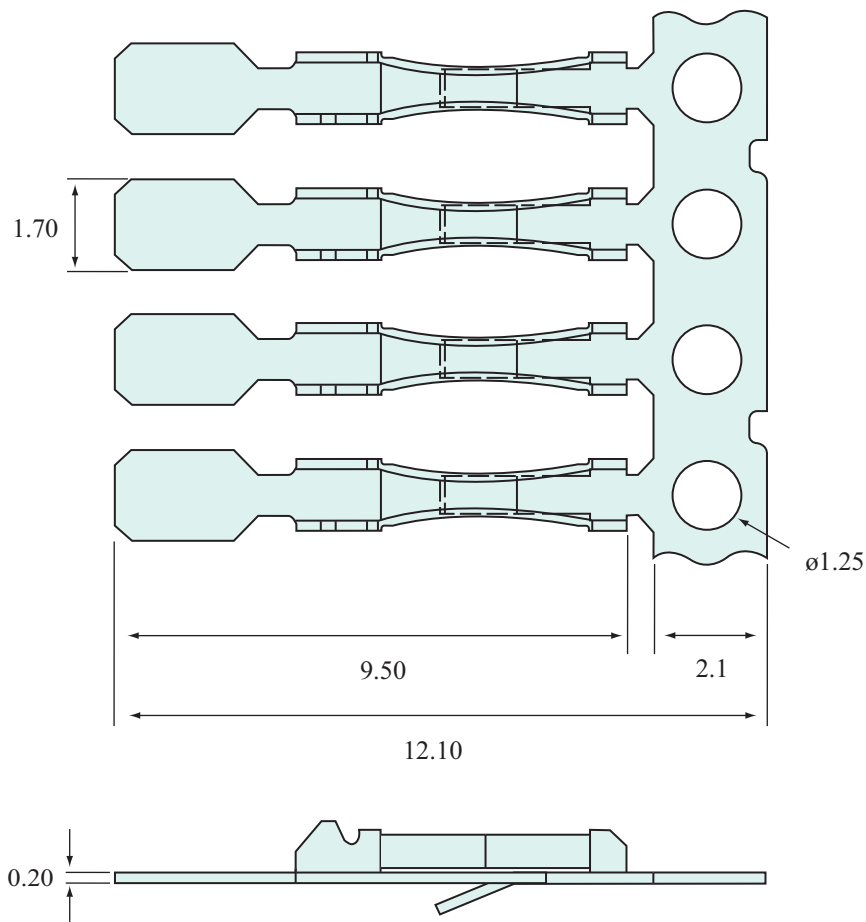

Unit : mm

Part Number	Description	Plating	Reel Quantity
MLFFSC506-T35	Low Force Female Solder	Tin	35,000

OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST

MEMCON Limited

Compass House Vision Park Chivers Way HISTON
Cambridge CB24 9AD United Kingdom
T +44 1223 257724 F +44 1223 257800
www.memcon.eu sales@memcon.eu

MEMCON (Asia) Limited

Level 7 Parkview Centre
7 Lau Li Street Causeway Bay Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia