



# Polarized & Locking Housing MHL Series

Designed for use on Membrane  
Switches, Flexible Circuits, Jumper  
Cables, Sensors, Textile Ribbons etc

Mates with Industry Standard  
0.635mm Walled Pin Headers

Suitable for use with Female Contacts

2.54mm Pitch





UL 94V-O Classified

Thermoplastic with Glass Fibre


Contact your Local Office for Application/  
Crimping Equipment

Non Polarized and Non Latching Variations  
also Available

RoHS Compliant

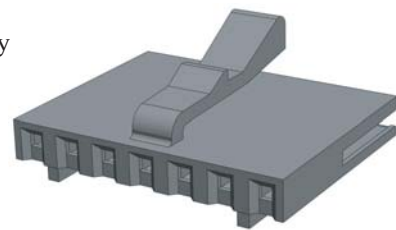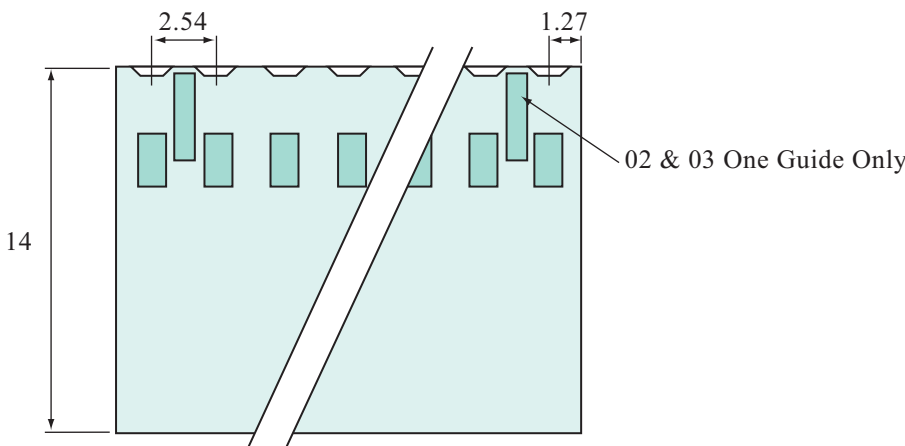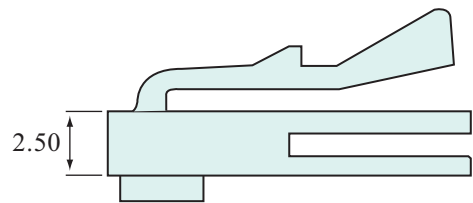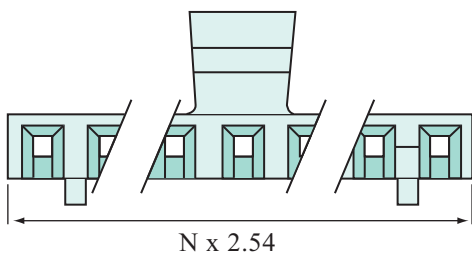

Unit : mm

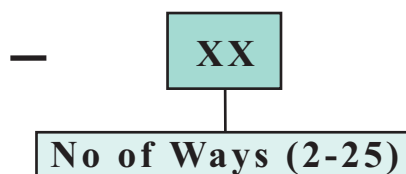

**MEMCON** Limited

Compass House Vision Park Chivers Way HISTON  
Cambridge CB24 9AD United Kingdom  
T +44 1223 257724 F +44 1223 257800  
www.memcon.eu sales@memcon.eu

**MEMCON** (Asia) Limited

Level 7 Parkview Centre  
7 Lau Li Street Causeway Bay Hong Kong  
T +852 3741 1411 F +852 3747 8980  
www.memcon.asia sales@memcon.asia