

4 LEG DOME with HOLE

Stable Forces per Batch Number

Excellent Tactile Effect

100% Traceability per Batch Number

Competitive Pricing

Superior Quality

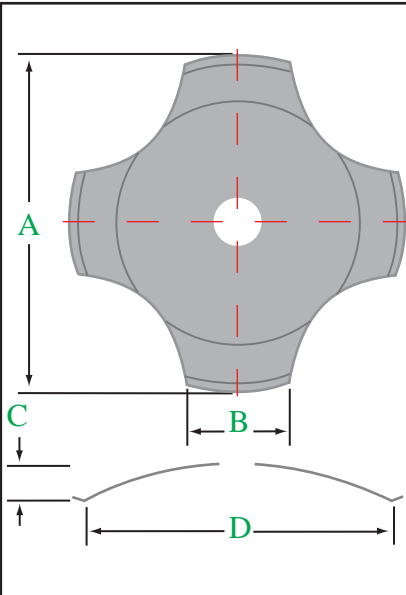
Used in a multitude of Industries, such as:
Membrane Switch, Automotive, Consumer
Electronics, Medical, Appliance, etc

Suitable for LED Lighting

RoHS Compliant



Contact Configuration	SPST, Normally Open	Contact Resistance	<100 ohms
Contact Bounce (on)	<0.3ms	with Gold or Silver Plating	<1 ohm
Contact Bounce (off)	<6ms	Voltage/Current Maximum	12mA @ 24 Volts DC, RL
Operating Temperature	55°C to 125°C	Breakdown Voltage	Over 200 Volts
Storage Temperature	55°C to 125°C	Material	Stainless Steel Type 304
Humidity	0-97% (no condensation)	Life Expectancy	1 Million

	Part No	Force	Size	Dimensions (mm)			
				Thickness	A	B	C
	MD 8.4 4 LEG-H400	400g	8.4mm	0.10	8.40	1.79	0.48
	MD 10.4 4 LEG-H280	280g	10.0mm	0.05	10.00	2.28	0.58
	MD 12.4 4 LEG-H350	350g	12.0mm	0.06	12.00	2.12	0.65

MEMCON (Asia) Limited

Level 7 Parkview Centre
7 Lau Li Street Causeway Bay Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia

GB Issue 1

MEMCON Limited

Compass House Vision Park Chivers Way HISTON
Cambridge CB24 9AD United Kingdom
T +44 1223 257724 F +44 1223 257800
www.memcon.eu sales@memcon.eu

MEMCON® is a registered trade mark of Memcon Limited

MEMCON North America

3786 Stadium Drive Bridgman
Michigan 49106 USA
T +1 269 466 5632 F +1 269 466 6034
www.memcon.net sales@memcon.net